


hydraulic piston cylinders UCD7F

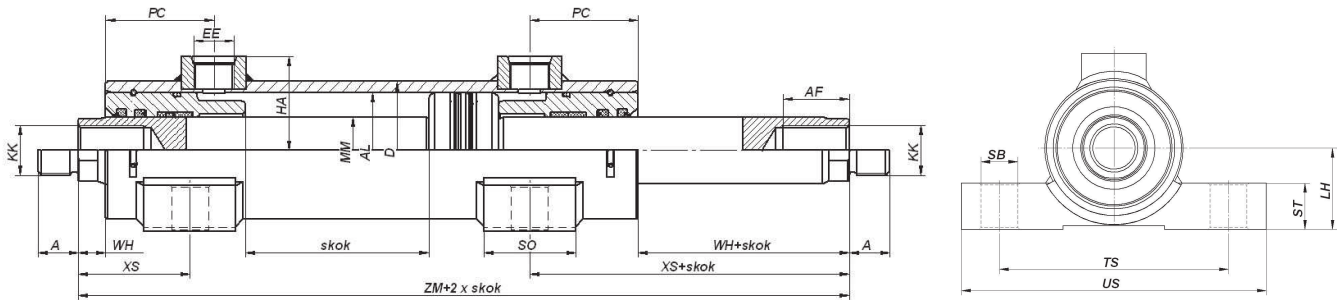

AL	40	50	63	80	100
MM	22	28	36	45	56
A	18	20	22	30	36
AF	16	30	36	45	50
D	50	60	75	95	120
EE	M16x1.5	M16x1.5	M22x1.5	M27x2	M33x2
HA	37	42	50	62	75
KK	M16x1.5	M22x1.5	M27x2	M33x2	M42x2
LH	31	38	44	57	68
PC	48	47	59	67	86
SB	11	14	20	20	26
SO	30	35	50	50	50
ST	15	18	25	30	35
TS	83	102	124	149	172
US	110	130	165	190	240
WH	10	15	15	18	20
XS	58	62	74	85	96
ZM	165	183	220	262	306

Standardised pitch sequence: 100, 125, 160, 200, 250, 320, 400, 500, 630, 800, 1000, 1250, 1600, 2000

Piston pitch and piston rod diameters may be selected outside the typical sequence according to individual customer needs.

AL Piston diameters - 25, 32, 60, 70, 90, 110, 150, 180, 200 – provided upon special customer order.

* oil connections according to PN-64/M-73101

PONAR Luban Sp. z o.o. reserves the right to implement design modifications not affecting cylinder casing.